

The above lights are designed for use on power driven vessels under 20 meters (65.6 ft.) in length operating on a nominal 12 volt or 32 volt system (see bulb data chart below for selection of both proper bulb and proper size light). In order to comply with the '72 COLREGS and the U.S. Inland Navigation Rules, the following must be adhered to:

MOUNTING INFORMATION


Read all instructions before proceeding.

- 1). For proper light selection, positioning and configuration, refer to A.B.Y.C. Standard A-16*, the '72 COLREGS, and the U.S. Inland Navigation Rules*.
- 2). These lights are designed to be mounted on a vertical surface. The mounting surface for Cat. No. 0005 Series Masthead and Special Purpose Lights and Cat. No. 0007 Series Stern and Towing Lights must be perpendicular to the fore-aft centerline of the boat and facing in the proper direction. The mounting surface for Cat. No. 0004 Series Side Lights must be parallel to the fore-aft centerline of the boat. (See Diagram).
- 3). Draw one 2 inch long horizontal reference line at the selected mounting location. Then draw two vertical lines, 25/32 inch apart, each intersecting the line at right angles.
- 4). Drill to accommodate #10 screws at each of the two line intersections created above.
- 5). Attach supply connections to the light, making sure to wire in accordance with both A.B.Y.C. Standard E-9* and U.S. Coast Guard Safety Standards for Boat Electrical Systems (33 CFR 183)*
- 6). Mount the light.

* The above referenced standards can be obtained from:

- | | |
|--|--|
| <p>(1) American Boat & Yacht Council, Inc
 613 Third Street, Suite 10
 Annapolis, MD 21403</p> | <p>(2) U.S. Coast Guard
 Washington, D.C. 20593
 (or your local C.G. Office)</p> |
|--|--|

DIAGRAM

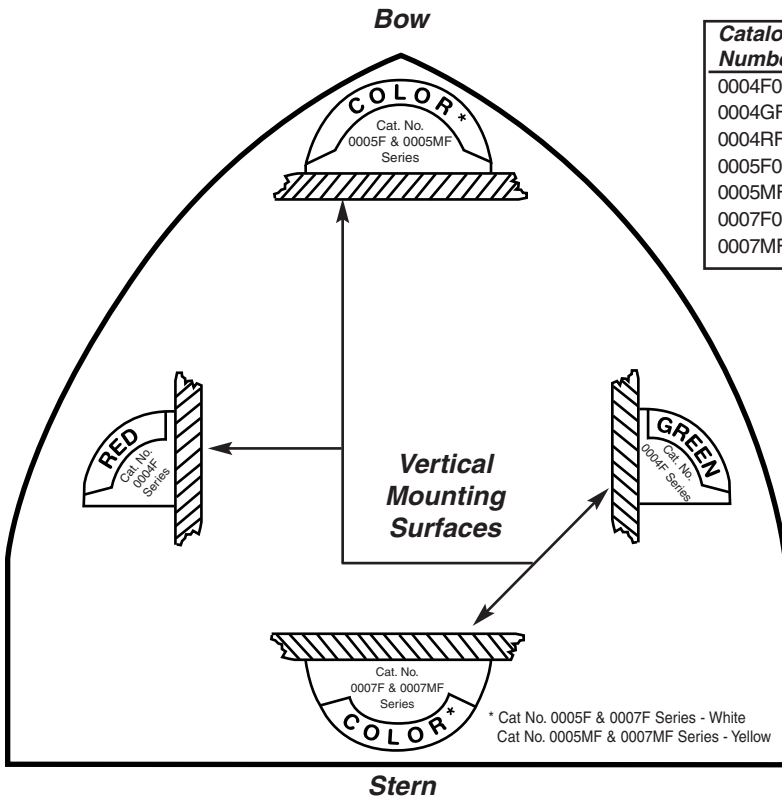

Catalog Numbers	Color/Description	Visibility Miles	12V Bulb	32V Bulb
0004F03XXX	Red/Green Side Lights (Pr)	2	0070DP1CLR	0070DP2CLR
0004GF3XXX	Green Side Light	2	0070DP1CLR	0070DP2CLR
0004RF3XXX	Red Side Light	2	0070DP1CLR	0070DP2CLR
0005F03XXX	White Masthead Light	3	0070DP1CLR	0070DP2CLR
0005MF3XXX	Yellow Special Purpose Light	2	0070DP1CLR	0070DP2CLR
0007F03XXX	White Stern Light	2	0070DP1CLR	0070DP2CLR
0007MF3XXX	Yellow Towing Light	2	0070DP1CLR	0070DP2CLR

NOTE: To complete the above listed catalog numbers, replace the XXX with the following finish designations:
 CHR = Chrome Plated Brass ex. 0004F03CHR
 GAL = Galvanized Steel ex. 0004F03GAL
 POL = Polished Brass ex. 0004F03POL